



**LightCarbon Asymmetric Design 29er MTB Carbon Rims For XC/TR/AM/EN**

Model	AD930-XC	AD930GP-XC	AD933GP-XC	AD933-TR	AD938-AM	AD938-EN	MC937-EN	AD940-EN
Sectional Drawing								
Weight(±15g)	360g	310g	340g	380g	450g	490g	500g	490g
Terrain (Recommended)	Cross Country	Cross Country	Cross Country	Trail	All Mountain	Enduro/E-bike	AM/Enduro	Enduro/E-bike
ERD	596mm	596mm	590mm	590mm	584mm	584mm	604mm	584mm
Material	T700	T700+T800+Graphene	T700+T800+Graphene	T700+T800+Graphene	T700	T700	T700	T700
Max Weight Limit	120kg/265lb	100kg/220lb	100kg/220lb	120kg/265lb	120kg/265lb	120kg/265lb	120kg/265lb	120kg/265lb
Max Spoke Tension	145kgf	145kgf	145kgf	145kgf	145kgf	145kgf	145kgf	145kgf
Max Tire Pressure	40psi/2.7bar	40psi/2.7bar	40psi/2.7bar	40psi/2.7bar	35psi/2.4bar	35psi/2.4bar	35psi/2.4bar	35psi/2.4bar
Tire Size (Recommended)	29*2.0"-2.4"	29*2.0"-2.4"	29*2.1"-2.5"	29*2.1"-2.5"	29*2.3"-2.8"	29*2.3"-2.8"	29*2.25"-2.6"	29*2.35"-3.0"

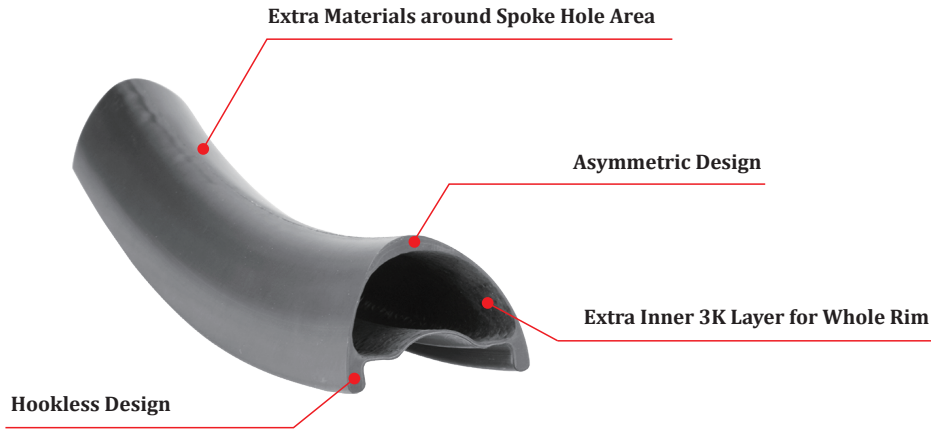



### LightCarbon 27.5er & 29er E-MTB Carbon Rims for E-bike/Enduro/Downhill

Model	RD737-EN/DH	MC937-EN	AD938-EN	AD940-EN
Sectional Drawing				
Weight(±15g)	520g	500g	490g	490g
Terrain (Recommended)	27.5er Ebike/Enduro/Downhill	29er Ebike/Enduro	29er Ebike/Enduro	29er Ebike/Enduro
ERD	559mm	604mm	584mm	584mm
Material	T700	T700	T700	T700
Max Weight Limit	120kg/265lb	120kg/265lb	120kg/265lb	120kg/265lb
Max Spoke Tension	145kgf	145kgf	145kgf	145kgf
Max Tire Pressure	40psi/2.7bar	35psi/2.4bar	35psi/2.4bar	35psi/2.4bar
Tire Size (Recommended)	650b*2.3"-2.8"	29*2.25"-2.6"	29*2.3"-2.8"	29*2.35"-3.0"

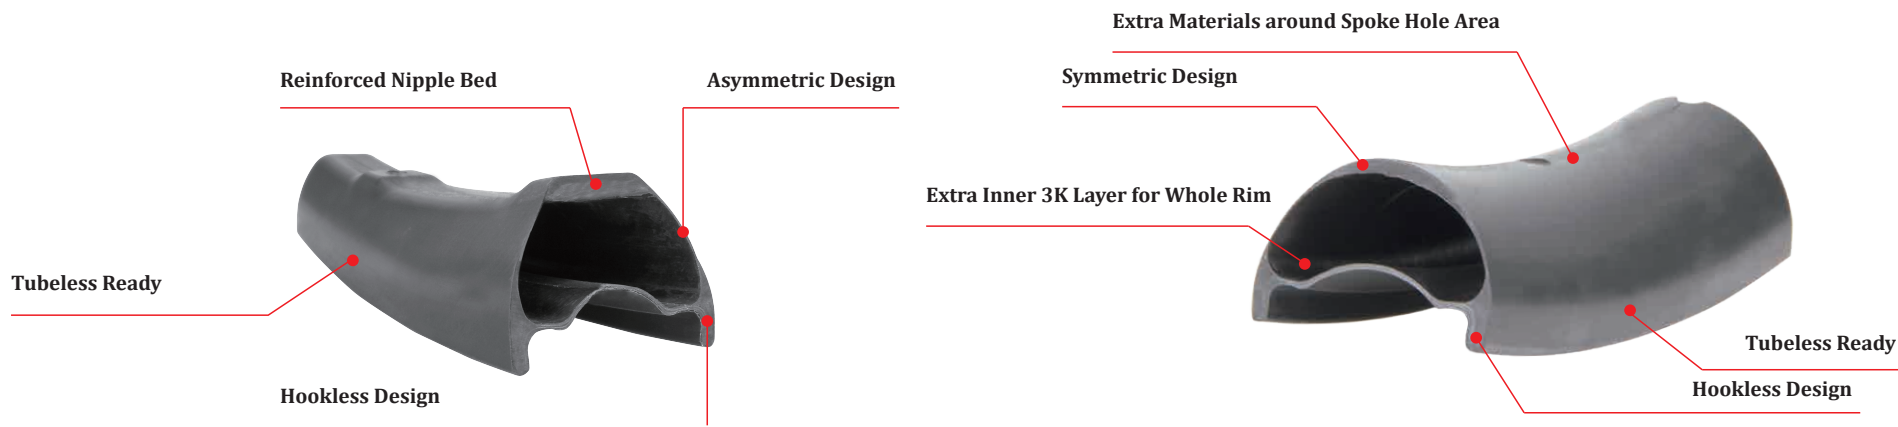

### LightCarbon 29er MTB Carbon Rims With Extra Reinforced Nipple Bed

Model	MC932-XC	MC932GP-XC	RD936-AM	RD936-EN
Sectional Drawing				
Weight(±15g)	350g	310g	435g	460g
Terrain (Recommended)	Cross Country	Cross Country	All Mountain	AM/Enduro
ERD	595mm	595mm	584mm	584mm
Material	T700	T700+T800+Graphene	T700	T700
Max Weight Limit	120kg/265lb	100kg/220lb	120kg/265lb	120kg/265lb
Max Spoke Tension	145kgf	145kgf	145kgf	145kgf
Max Tire Pressure	40psi/2.7bar	40psi/2.7bar	35psi/2.4bar	35psi/2.4bar
Tire Size (Recommended)	29*2.1"-2.5"	29*2.1"-2.5"	29*2.2"-2.6"	29*2.2"-2.6"

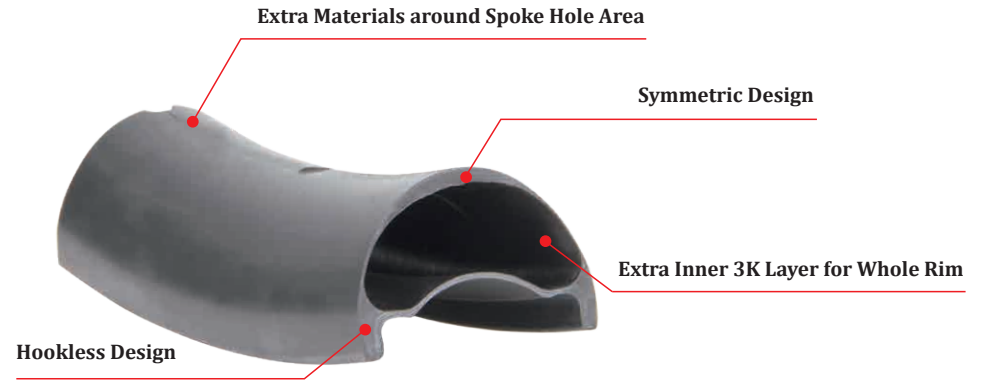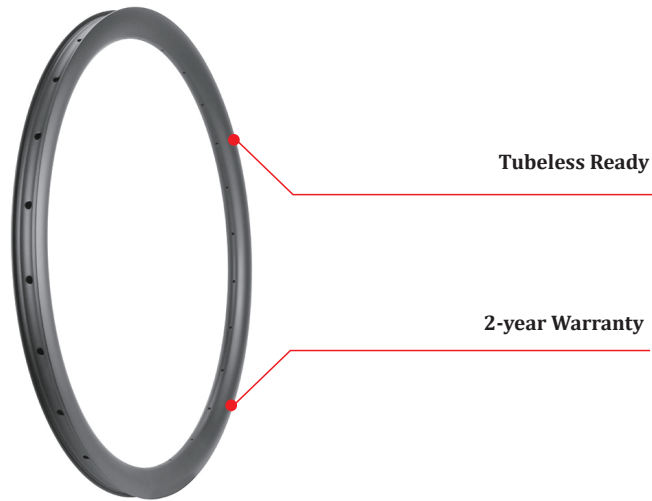



**LightCarbon 650b MTB Carbon Rims 27.5er Mountain Bike Rims For XC/AM/EN/DH**

Model	AD730-XC	AD730GP-XC	RD737-AM	RD737-EN/DH
Sectional Drawing				
Weight(±15g)	340g	295g	410g	520g
Terrain (Recommended)	Cross Country	Cross Country	All Mountain	Ebike/Enduro/Downhill
ERD	556mm	556mm	559mm	559mm
Material	T700	T700+T800+Graphene	T700	T700
Max Weight Limit	120kg/265lb	100kg/220lb	120kg/265lb	120kg/265lb
Max Spoke Tension	145kgf	145kgf	145kgf	145kgf
Max Tire Pressure	40psi/2.7bar	40psi/2.7bar	40psi/2.7bar	40psi/2.7bar
Tire Size (Recommended)	650b*2.0"-2.4"	650b*2.0"-2.4"	650b*2.3"-2.8"	650b*2.3"-2.8"




### LightCarbon 700C Gravel Carbon Rims For Cyclocross And Gravel Bikes

Model	LCX28	LCX33	LZX33	LCX44	LZX44
Sectional Drawing					
Weight(±15g)	380g	400g	400g	430g	430g
Terrain (Recommended)	Cyclocross/Gravel	Cyclocross/Gravel	Cyclocross/Gravel	Cyclocross/Gravel	Cyclocross/Gravel
ERD	589mm	579mm	579mm	557mm	557mm
Material	T700+T800	T700+T800	T700+T800	T700+T800	T700+T800
Max Weight Limit	110kg/240lb	120kg/265lb	120kg/265lb	120kg/265lb	120kg/265lb
Max Spoke Tension	130kgf	130kgf	130kgf	130kgf	130kgf
Max Tire Pressure	90psi/6.2bar	90psi/6.2bar	60psi/4.1bar	90psi/6.2bar	60psi/4.1bar
Tire Size (Recommended)	700*30C-50C	700*30C-50C	700*30C-50C	700*30C-50C	700*30C-50C

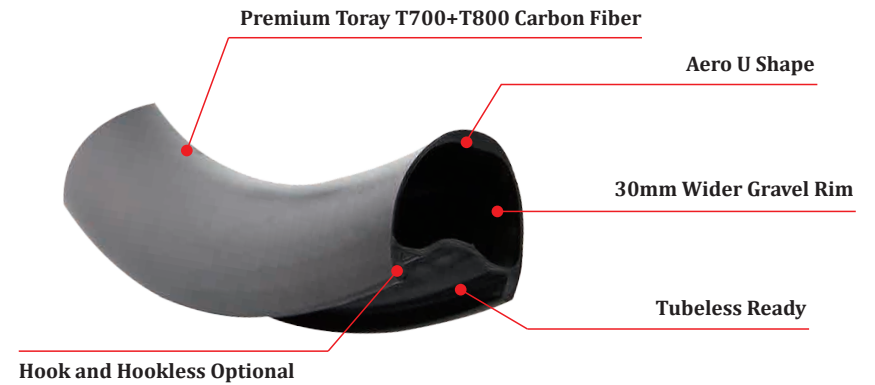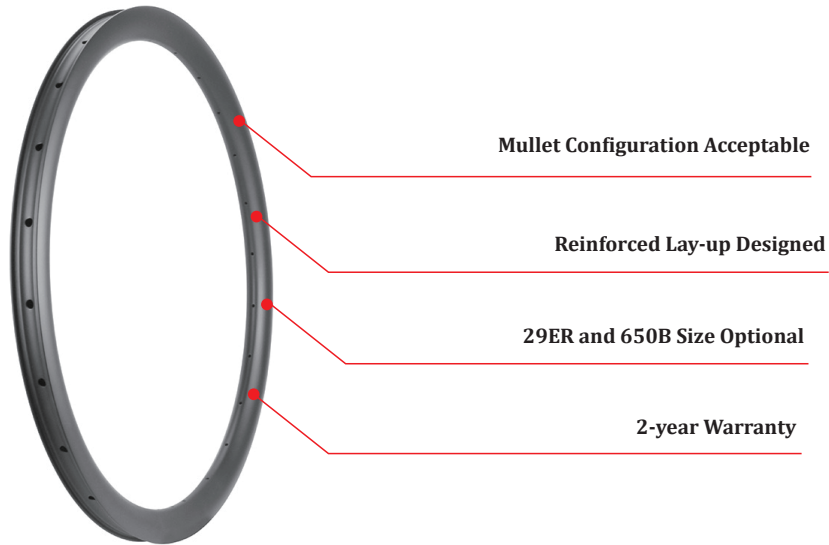

## LightCarbon 29er And 650b Gravel Carbon Rims For Cyclocross And Gavel Bikes

Model	LCX930	LZX930	LCX730	LZX730
Sectional Drawing				
Weight(±15g)	450g	430g	430g	410g
Terrain (Recommended)	Cyclocross/Gravel	Cyclocross/Gravel	Cyclocross/Gravel	Cyclocross/Gravel
ERD	573mm	573mm	535mm	535mm
Material	T700+T800	T700+T800	T700+T800	T700+T800
Max Weight Limit	120kg/265lb	120kg/265lb	120kg/265lb	120kg/265lb
Max Spoke Tension	130kgf	130kgf	130kgf	130kgf
Max Tire Pressure	90psi/6.2bar	60psi/4.1bar	90psi/6.2bar	60psi/4.1bar
Tire Size (Recommended)	29er*2.0"-2.4"	29er*2.0"-2.4"	650b*2.0"-2.4"	650b*2.0"-2.4"

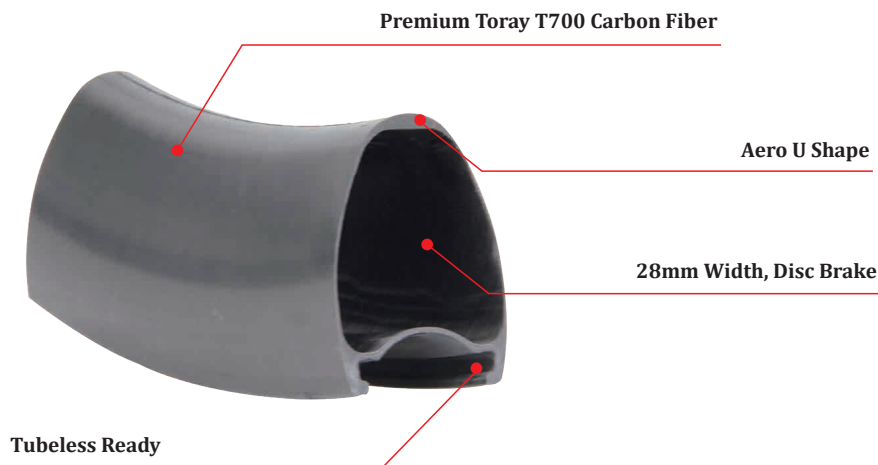



Depth 30/38/45/50/60/80mm optional

2-year Warranty



### LightCarbon Road Disc 25mm Wide Carbon Clincher Rims 700C


Model	RD25-30C	RD25-38C	RD25-45C	RD25-50C	RD25-60C	RD25-80C
Sectional Drawing						
Weight(±15g)	380g	390g	420g	450g	520g	660g
Terrain (Recommended)	Road	Road	Road	Road	Road	Road
ERD	585mm	569mm	555mm	454mm	525mm	485mm
Material	T700	T700	T700	T700	T700	T700
Max Weight Limit	100kg/220lb	110kg/240lb	110kg/240lb	115kg/250lb	115kg/250lb	120kg/265lb
Max Spoke Tension	130kgf	130kgf	130kgf	130kgf	130kgf	130kgf
Max Tire Pressure	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar
Tire Size (Recommended)	700*25-40C	700*25-40C	700*25-40C	700*25-40C	700*25-40C	700*25-40C

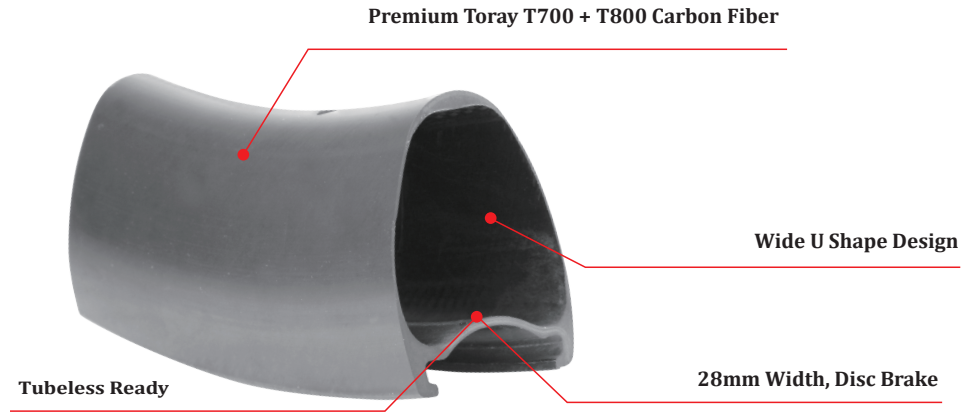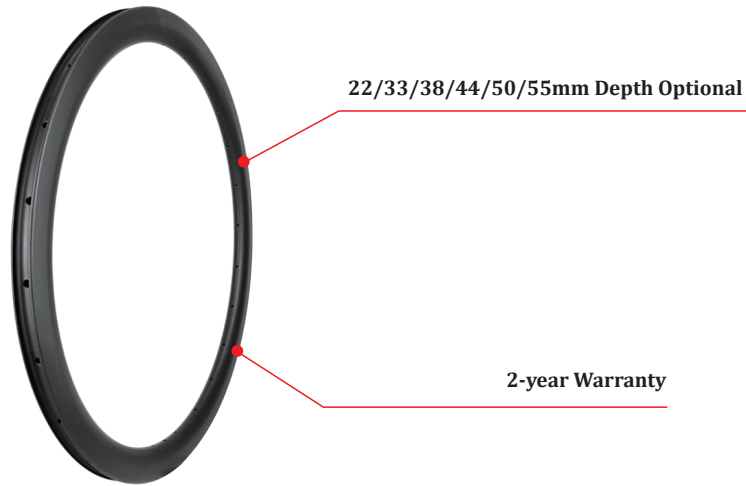

## LightCarbon Road Disc 28mm Wide Carbon Clincher Rims 700C

Model	RD28-22C	RD28-33C	RD28-38C	RD28-44C	RD28-50C	RD28-55C
Sectional Drawing						
Weight(±15g)	380g	400g	410g	430g	460g	480g
Terrain (Recommended)	Road	Road	Road	Road	Road	Road
ERD	601mm	579mm	569mm	557mm	545mm	535mm
Material	T700	T700	T700	T700	T700	T700
Max Weight Limit	90kg/198lb	105kg/230lb	105kg/230lb	110kg/240lb	115kg/250lb	115kg/250lb
Max Spoke Tension	130kgf	130kgf	130kgf	130kgf	130kgf	130kgf
Max Tire Pressure	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar
Tire Size (Recommended)	700*28C-45C	700*28C-45C	700*28C-45C	700*28C-45C	700*28C-45C	700*28C-45C



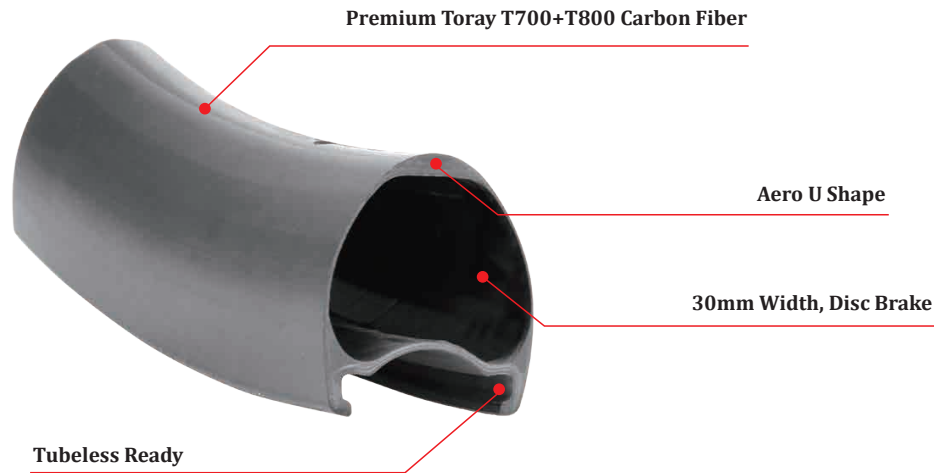


Depth 35/45/50/58mm optional

2-year Warranty




## LightCarbon Asymmetric Design 30mm Wide Road Disc Carbon Clincher Rims 700C

Model	AD35C-SL	AD45C-SL	AD50C-SL	AD58C-SL
Sectional Drawing				
Weight(±15g)	410g	455g	475g	525g
Terrain (Recommended)	Road	Road	Road	Road
ERD	570mm	550mm	540mm	524mm
Material	T700+T800	T700+T800	T700+T800	T700+T800
Max Weight Limit	100kg/220lb	100kg/220lb	100kg/220lb	100kg/220lb
Max Spoke Tension	130kgf	130kgf	130kgf	130kgf
Max Tire Pressure	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar
Tire Size (Recommended)	700*28-45C	700*28-45C	700*28-45C	700*28-45C

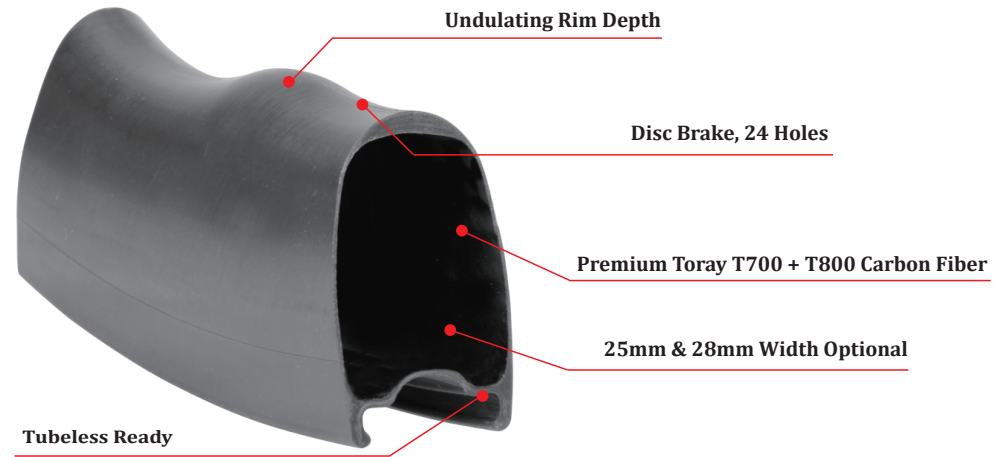

**LightCarbon Undulating Rim Depth 700C Carbon Clincher Rims (Disc Brake)**


Model	URD25-450-SL		URD25-450		URD28-450-SL		URD28-450		URD28-560-SL		URD28-560	
Sectional Drawing												
Weight(±15g)	390g	430g	470g	490g	510g	530g						
Terrain (Recommended)	Road	Road	Road	Road	Road	Road						
ERD	540mm	540mm	540mm	540mm	520mm	520mm						
Material	T800	T700	T800	T700	T800	T700						
Max Weight Limit	100kg/220lb	120kg/265lb	100kg/220lb	120kg/265lb	100kg/220lb	120kg/265lb						
Max Spoke Tension	130kgf	130kgf	130kgf	130kgf	130kgf	130kgf						
Max Tire Pressure	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar						
Tire Size (Recommended)	700*25C-40C	700*25C-40C	700*28C-45C	700*28C-45C	700*28C-45C	700*28C-45C						

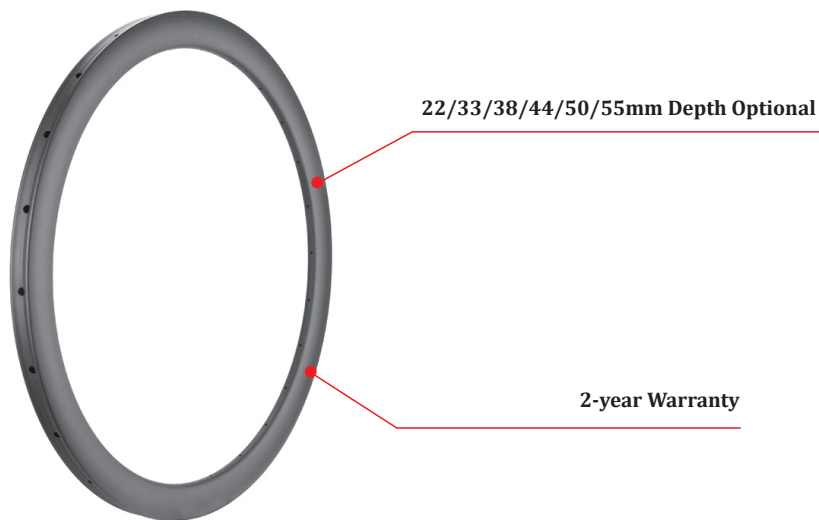

### LightCarbon 28mm Wide 700C Tubular Carbon Rims Super Light (Disc Brake)

Model	RD28-22T-SL	RD28-33T-SL	RD28-38T-SL	RD28-44T-SL	RD28-50T-SL	RD28-55T-SL
Sectional Drawing						
Weight(±15g)	300g	320g	330g	340g	360g	380g
Terrain (Recommended)	Road	Road	Road	Road	Road	Road
ERD	601mm	579mm	569mm	557mm	545mm	535mm
Material	T700+T800	T700+T800	T700+T800	T700+T800	T700+T800	T700+T800
Max Weight Limit	90kg/198lb	105kg/230lb	105kg/230lb	110kg/240lb	115kg/250lb	115kg/250lb
Max Spoke Tension	130kgf	130kgf	130kgf	130kgf	130kgf	130kgf
Max Tire Pressure	120psi/8.2bar	120psi/8.2bar	120psi/8.2bar	120psi/8.2bar	120psi/8.2bar	120psi/8.2bar
Tire Size (Recommended)	700*25C-35C	700*25C-35C	700*25C-35C	700*25C-35C	700*25C-35C	700*25C-35C

Premium Toray T700 Carbon Fiber

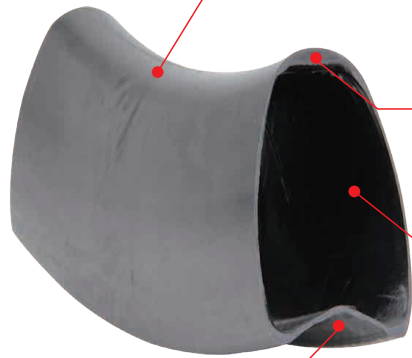

Aero U Shape

28mm Width, Disc Brake


For Tubular Tire

Depth 33/38/44/50/55mm optional










3K Grooved, High TG Brake Surface

2-year Warranty

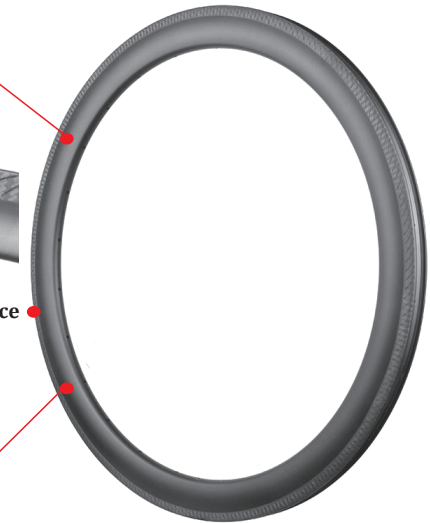







## LightCarbon 28mm Wide 700C Tubular Carbon Rims (Rim-Brake)

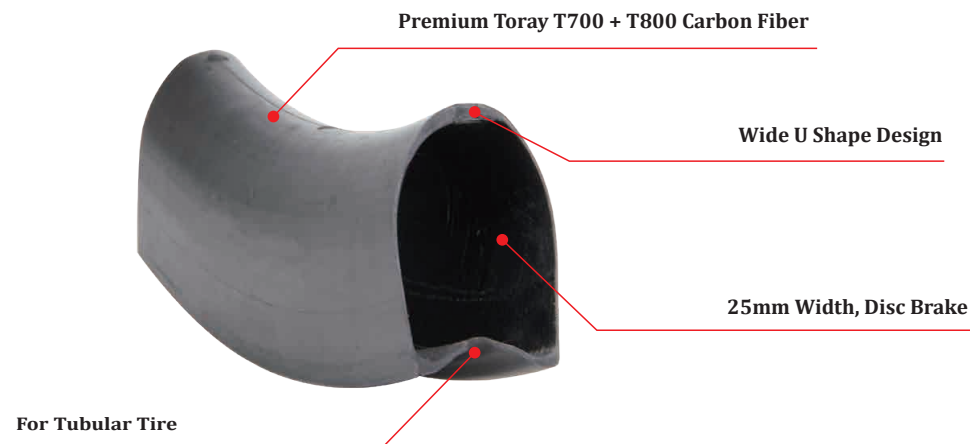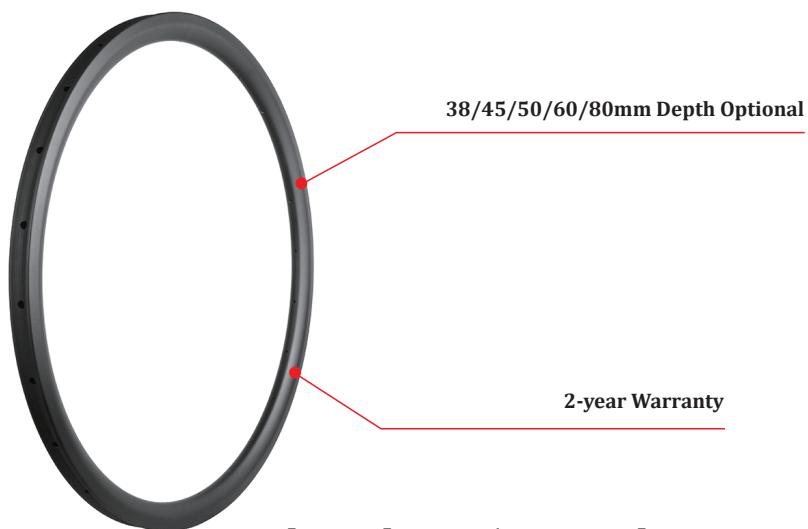Model	RV28-33T	RV28-38T	RV28-44T	RV28-50T	RV28-55T
Sectional Drawing					
Weight(±15g)	350g	360g	370g	410g	420g
Terrain (Recommended)	Road	Road	Road	Road	Road
ERD	579mm	569mm	557mm	545mm	535mm
Material	T700	T700	T700	T700	T700
Max Weight Limit	105kg/230lb	105kg/230lb	110kg/240lb	115kg/250lb	115kg/250lb
Max Spoke Tension	130kgf	130kgf	130kgf	130kgf	130kgf
Max Tire Pressure	120psi/8.2bar	120psi/8.2bar	120psi/8.2bar	120psi/8.2bar	120psi/8.2bar
Tire Size (Recommended)	700*25C-35C	700*25C-35C	700*25C-35C	700*25C-35C	700*25C-35C





## LightCarbon 25mm Wide 700C Tubular Carbon Rims Super Light (Disc Brake)

Model	RD25-38T-SL	RD25-45T-SL	RD25-50T-SL	RD25-60T-SL	RD25-80T-SL
Sectional Drawing					
Weight(±15g)	320g	330g	350g	430g	530g
Terrain (Recommended)	Road	Road	Road	Road	Road
ERD	579mm	569mm	557mm	545mm	535mm
Material	T700+T800	T700+T800	T700+T800	T700+T800	T700+T800
Max Weight Limit	105kg/230lb	105kg/230lb	110kg/240lb	115kg/250lb	115kg/250lb
Max Spoke Tension	130kgf	130kgf	130kgf	130kgf	130kgf
Max Tire Pressure	120psi/8.2bar	120psi/8.2bar	120psi/8.2bar	120psi/8.2bar	120psi/8.2bar
Tire Size (Recommended)	700*23C-33C	700*23C-33C	700*23C-33C	700*23C-33C	700*23C-33C

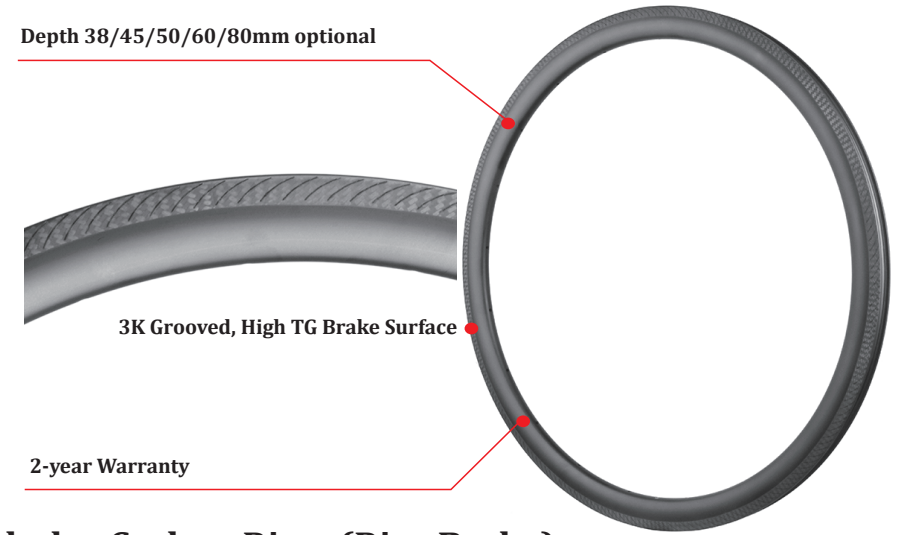


**LightCarbon 25mm Wide 700C Tubular Carbon Rims (Rim-Brake)**

Model	RV25-38T	RV25-45T	RV25-50T	RV25-60T	RV25-80T
Sectional Drawing					
Weight(±15g)	350g	370g	390g	470g	530g
Terrain (Recommended)	Road	Road	Road	Road	Road
ERD	579mm	569mm	557mm	545mm	535mm
Material	T700+T800	T700+T800	T700+T800	T700+T800	T700+T800
Max Weight Limit	105kg/230lb	105kg/230lb	110kg/240lb	115kg/250lb	115kg/250lb
Max Spoke Tension	130kgf	130kgf	130kgf	130kgf	130kgf
Max Tire Pressure	120psi/8.2bar	120psi/8.2bar	120psi/8.2bar	120psi/8.2bar	120psi/8.2bar
Tire Size (Recommended)	700*23C-33C	700*23C-33C	700*23C-33C	700*23C-33C	700*23C-33C

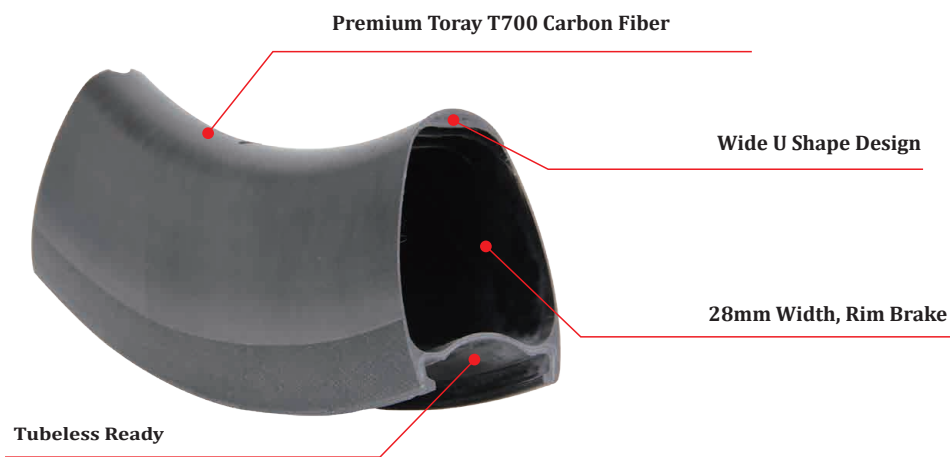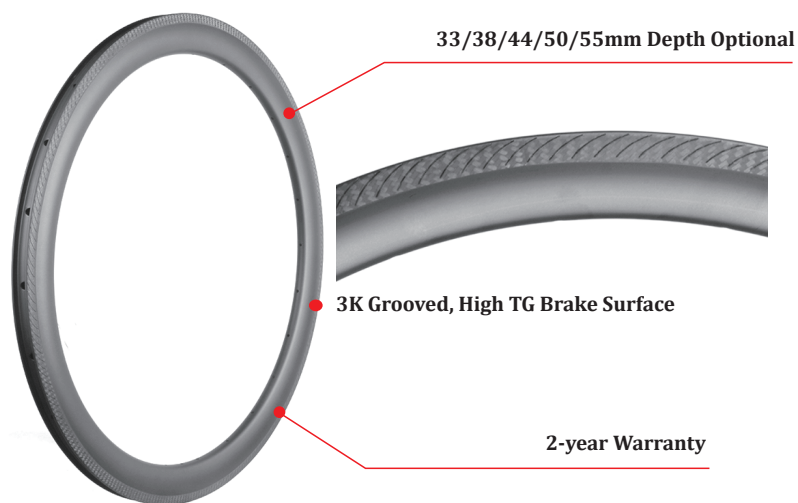

### LightCarbon Road Rim-brake 28mm Wide Carbon Clincher Rims 700C


Model	RV28-33C	RV28-38C	RV28-44C	RV28-50C	RV28-55C
Sectional Drawing					
Weight(±15g)	460g	470g	480g	510g	530g
Terrain (Recommended)	Road	Road	Road	Road	Road
ERD	579mm	569mm	557mm	545mm	535mm
Material	T700	T700	T700	T700	T700
Max Weight Limit	105kg/230lb	105kg/230lb	110kg/240lb	110kg/240lb	110kg/240lb
Max Spoke Tension	130kgf	130kgf	130kgf	130kgf	130kgf
Max Tire Pressure	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar
Tire Size (Recommended)	700*28C-45C	700*28C-45C	700*28C-45C	700*28C-45C	700*28C-45C

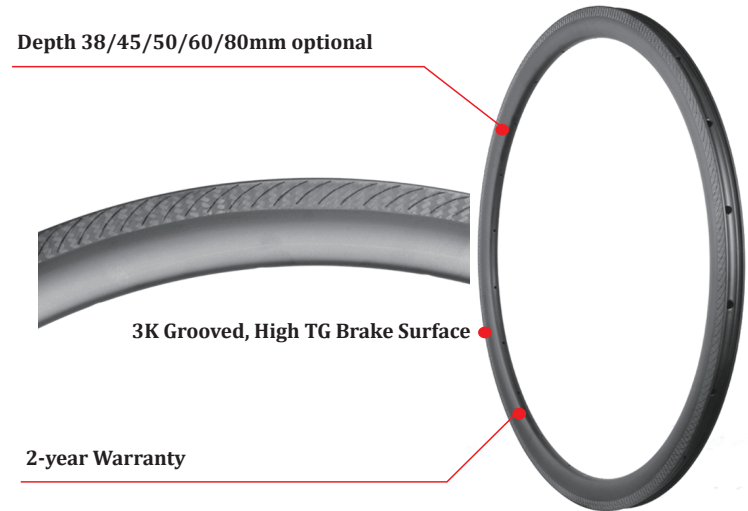

### LightCarbon Road Rim-brake 25mm Wide Carbon Clincher Rims 700C

Model	RV25-38C	RV25-45C	RV25-50C	RV25-60C	RV25-80C
Sectional Drawing					
Weight(±15g)	460g	480g	500g	560g	660g
Terrain (Recommended)	Road	Road	Road	Road	Road
ERD	569mm	555mm	545mm	525mm	485mm
Material	T700	T700	T700	T700	T700
Max Weight Limit	110kg/240lb	110kg/240lb	115kg/250lb	120kg/265lb	120kg/265lb
Max Spoke Tension	130kgf	130kgf	130kgf	130kgf	130kgf
Max Tire Pressure	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar
Tire Size (Recommended)	700*25C-45C	700*25C-45C	700*25C-45C	700*25C-45C	700*25C-45C



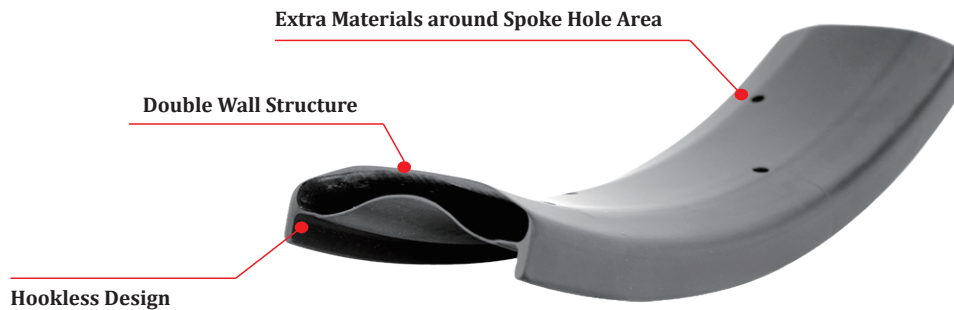

**LightCarbon 26er and 27.5er (650b) Fat Bike Carbon Rims**

Model	F26-65	F26-80	F26-100	F27.5-80
Sectional Drawing				
Weight(±15g)	600g	680g	750g	615g
Terrain (Recommended)	fat bike/snow bike/beach bike	fat bike/snow bike/beach bike	fat bike/snow bike/beach bike	fat bike/snow bike/beach bike
ERD	526mm	524mm	526mm	545mm
Material	T700	T700	T700	T700
Max Weight Limit	120kg/265lb	120kg/265lb	120kg/265lb	120kg/265lb
Max Spoke Tension	135kgf	135kgf	135kgf	135kgf
Max Tire Pressure	25psi/1.7bar	25psi/1.7bar	25psi/1.7bar	25psi/1.7bar
Tire Size (Recommended)	26*3.5"-4.5"	26*3.8"-5.0"	26*4.0"-5.2"	650b*3.8"-5.0"